




END LOADER

Washer/Extractor

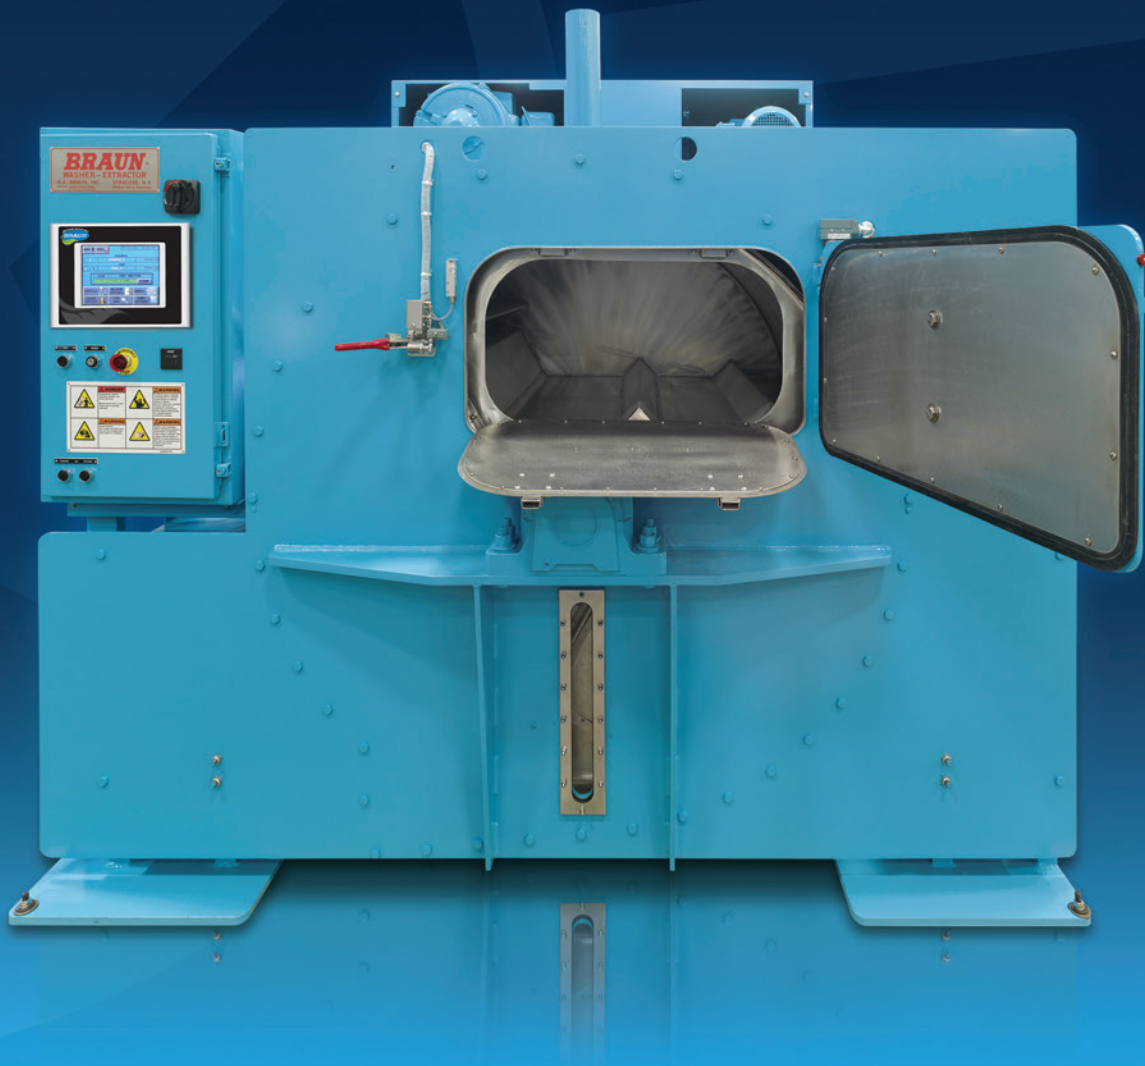

U.S.A.

ISO 9001:2015 Certified
(Quality Management System)

All Braun Products are Proudly
Manufactured in the U.S.A.

gabraun.com

END LOADER

STANDARD MODELS

- Available in processing capacities of 100, 200, 300, and 400 lbs. dry weight load sizes
- Ideal for low ceiling installations and washrooms with limited space
- Strength and durability – the highest quality materials and simple, rugged design make this a truly heavy duty machine. The Braun End Loader will operate for decades
- Thorough wash action and high-speed extraction assure high-quality washing

CONTROL PANEL

Standard on all Braun End Loader machines, touch screen controls are simple, intuitive, easy to use, and control all major machine functions.

AUTOMATIC SAFETY AND AUTO LOAD REBALANCE TECHNOLOGY

Optical sensors on Braun End Loaders will instruct the machines to:

- Automatically shut down if they are out of balance
- Automatically balance loads prior to moving into the extraction phase to evenly distribute wet goods against the cylinder, eliminating the need for artificial counterbalances.



BRAUN'S NEUTRON SUSPENSION

- Unsurpassed vibration dampening allows for installation without a foundation, even on upper floors that can hold the static weight of the machine!
- Isolates vibration from the workspace
- Promotes less wear on major end components for exceptional durability and machine longevity
- Provides for consistent wash performance

Specifications

| End Loader Model | Max. Recommended Capacity – Lbs./Kg. | Cylinder Dia. X Depth – Inches/mm | Cylinder Volume – Cubic Ft./Cubic Meters | No. of Pockets | Cylinder Door Area Open for Loading – Sq. Inches/Sq. cm | Hgt. of Unloading Doors Above Floor – Inches/mm | Extract Motor – H.P. | Extract Speed – R.P.M. | Wash Motor – H.P. | Wash Speed – R.P.M. | Balance Motor – Speed | Drain Valve – Inches | Automatic Inlet Valves – Inches/mm | Steam Valve – Inches/mm | Overall Width w/Dispenser – Inches/mm | Overall Depth w/Dispenser – Inches/mm | Overall Height w/Dispenser - Inches/mm | Approx. Domestic Shipping Wt. (Net) – Lbs./kg. skidded | Approx. Export Shipping Wt. – Lbs./kg. | Export Cubage – Cubic Ft./Cubic Meters |
|------------------|--------------------------------------|-----------------------------------|--|----------------|---|---|----------------------|------------------------|-------------------|---------------------|-----------------------|----------------------|------------------------------------|-------------------------|---------------------------------------|---------------------------------------|--|--|--|--|
| Neutron 100-2 | 130 59 | 37 x 34 940 x 864 | 21.2 0.600 | 2 | 236 1,523 | 37.5 953 | 7.5 | UP | 1.5 | UP | UP | 6 152 | 2 51 | 3/4 19 | 62 1,581 | 64 1,626 | 73 1,855 | 3,850 1,746 | 3,850 1,746 | 171 4.79 |
| Neutron 200-2 | 230 105 | 44 x 42 1,118 x 1067 | 36.9 1.045 | 2 | 297 1,916 | 37.5 953 | 10 | UP | 3 | UP | UP | 6 152 | 2 51 | 3/4 19 | 73 1,855 | 75 1,905 | 73 1,855 | 5,720 2,594 | 6,850 3,107 | 318 9.01 |
| Neutron 300-3 | 350 159 | 54 x 42 1,372 x 1067 | 55.6 1.575 | 3 | 420 2,710 | 41.5 1,040 | 15 | UP | 5.4 | UP | UP | 6 152 | 2 51 | 3/4 19 | 101 2,565 | 84 2,133.6 | 85 2,160 | 9,475 4,297 | 11,275 5,113 | 506 14.32 |
| Neutron 400-3 | 450 204 | 60 x 44 1,524 x 1118 | 71.9 2.036 | 3 | 464 2,994 | 44 1,118 | 20 | UP | 7.5 | UP | UP | 8 203 | 2 51 | 1 1/4 32 | 108 2,743 | 88 2,235.2 | 91 2,311.4 | 12,780 5,796 | 14,500 6,576 | 575 16.28 |

UP = User Programmable



ISO 9001:2015 CERTIFIED
(Quality Management System)

G.A. Braun, Inc.
79 General Irwin Boulevard
N. Syracuse, NY 13212

Mail to:
P.O. Box 3029
Syracuse, NY 13220-3029

Phone
1-800-432-7286

Fax
(315) 475-4130

Parts Help Desk
1-800-432-7286 X 1

Service Help Desk
1-800-432-7286 X 2



U.S.A.

All Braun Products are Proudly
Manufactured in the U.S.A.